

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

THIS PAGE BLANK (USPTO)



The
Patent
Office

PCT/EP 99/08058



#5

INVESTOR IN PEOPLE

EP 99/08058

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 03 DEC 1999

WIPO PCT

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

EPO-DG 1

23. 11. 1999

(59)


09/830719

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

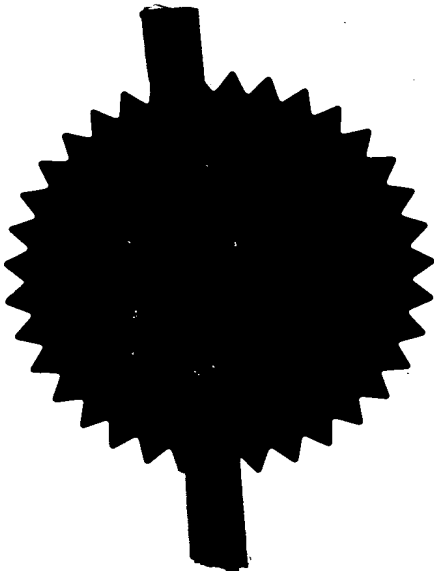

Signed

Dated

10 NOV 1999

THIS PAGE BLANK (USPTO)

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport

02NOV98 E401482-6 002840
P01/7700 0.00 - 9823819.9

1. Your reference

HL59863/001/CIV

2. Patent application number

(The Patent Office will fill in this part)

9823819.9

30 OCT 1998

3. Full name, address and postcode of the or of each applicant (underline all surnames)

TELEFONAKTIEBOLAGET L M ERICSSON
S126-25
Stockholm
Sweden

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

763730002
Sweden

4. Title of the invention

Processing Arrangements

5. Full name of your agent (if you have one)

Haseltine Lake & Co.

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Imperial House
15-19 Kingsway
London WC2B 6UD

34001

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day/month/year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day/month/year)

8. Is a statement of inventorship and of right to a grant of patent required in support of this request? (Answer "Yes" if:

Yes

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form	0
Description	8
Claim(s)	2
Abstract	1
Drawing(s)	3+3

10. If you are also filing any of the following, state how many against each item.

Priority documents	0
Translations of priority documents	0
Statement of inventorship and right to a grant of patent (<i>Patents Form 7/77</i>)	0
Request for preliminary examination and search (<i>Patents Form 9/77</i>)	1
Request for substantive examination (<i>Patents Form 10/77</i>)	0
Any other documents (<i>please specify</i>)	0

11. I/We request the grant of a patent on the basis of this application

Signature
Hasetine Lake & Co

Date
29th October 1998

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. C.I. Vigars

[0117] 9260197

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

PROCESSING ARRANGEMENTS

The present invention relates to processing arrangements for computer architectures.

DESCRIPTION OF THE RELATED ART

5 There are many conventional computer architectures which are based on a single main processor cooperating with a co-processor. The co-processor adds functionality that the main processor in the architecture does not have or does not perform particularly efficiently. The co-processor generally
10 uses instructions which are not implemented in the instruction set of the main processor. As such, many co-processors are used to address very specific code requirements, for example floating point arithmetic or
15 signal processing. In most applications, this means that the instruction set of the co-processor is specific to that co-processor.

 In addition, many main processors use real time operating systems to service multiple tasks and
20 exceptions, such as interrupts. Servicing multiple tasks can result in context changes which can absorb significant amounts of the processing power available in the processor. A context change occurs when the task being executed by a processor is changed. The
25 context of a task relates to the code corresponding to the task, and the state of the internal registers of the processor. Furthermore, in low power applications, in order to conserve power, sleep modes are used from which the processor must be reactivated when interrupt
30 or service requests occur. When the processor is reactivated the context must be loaded and then the service performed, the processor then returns to an inactive state. Such a process can consume a large amount of power.

35 It is therefore desirable to provide a computer

architecture which can overcome these disadvantages.

SUMMARY OF THE PRESENT INVENTION

According to one aspect of the present invention there is provided a processing arrangement for a computer comprising:

first processor means for processing a first set of instructions; and

second processor means for processing a second set of instructions, the second set of instructions being a subset of the first set of instructions, wherein the second processor means is arranged to receive control signals and to process instructions in dependence upon those control signals without reference to the first processor means.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram illustrating a computer processor architecture in accordance with the present invention;

Figure 2 shows a computer architecture including multiple processors; and

Figure 3 is a diagrammatic illustration of how processors embodying the present invention can realise the functionality of a desired virtual processor.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 1 shows a block diagram illustrating a host (or first) processor 1 connected with a shadow (or second) processor 2. In the example shown, the shadow processor 2 is used to control interrupts received from peripherals connected to the processor system.

The host processor 1 communicates with an external bus 3 by way of an external bus interface 4. The external bus 3 is used for transferring data to and from the main processor and memory devices (not shown).

The host processor 1 also includes a memory controller 5 for controlling data access with memory devices. The memory controller 5 is controlled itself by an execution unit 6 which has overall control of the main processor 1. The host processor 1 also include an arithmetic logic unit (ALU) 7 and a number of registers 8, sixteen in the example shown. The various components of the host processor 1 communicate with each other by way of appropriate internal buses.

In order that the host processor 1 can be held in a low power inactive mode for as long as possible, a shadow processor 2 is connected to the main processor 1. The shadow processor 2 includes an interrupt controller 10 which receives interrupt signals via interrupt inputs 12. The shadow processor also includes registers which correspond to selected ones of the registers of the host processor 1. The interrupt controller can be connected, as in the example of Figure 1, to peripherals connected to a peripheral bus 11.

The shadow processor 2 also includes an execution unit 14, code memory 15, and data memory 16. The shadow processor 2 operates to process a selected subset of the instructions from which the host processor operates, and these instructions are stored in the code memory 15. The shadow processor 2 has access to the host processor memory by way of a memory controller 17 which interfaces with the external bus 3 by way of the host external bus interface 4.

In order to provide a link between the host processor 1 and the shadow processor 2, the execution units of the two processors are connected by way of a host interrupt controller 18, and the registers of the processors are connected by a register bridge unit 19. The Host Interrupt Controller 18 is a module which

allows the shadow processor to issue an interrupt to the host processor in order to cause a change in task execution, a context change, appropriate to the requirements of the system. It generates an interrupt to the host using the host interrupt protocol and indicating the source of the interrupt as a vector programmed by the shadow process related to the new task required.

The following description, of the process used to service an interrupt received from a peripheral bus 11 is one example of the operation of the shadow processor 2. A peripheral (not shown) raises an interrupt request on the interrupt input lines 12. The input controller 10 operates to interpret the interrupt request, and if the interrupt request is of the type able to be processed by the shadow processor 2, then the shadow processor 2 will service that interrupt. An example of an interrupt is if an external device such as a serial port has received data from a system to which it is attached. The data from such a serial port may be contained within a message body including information about the source and content of the data. The shadow processor 2 then services the interrupts required by receiving the message then removing the data from that message. Once the data has been removed and checked it issues an interrupt to the main processor 1 via the Host Interrupt Controller 18 having first set up the context needed by the task to service the data within the message. The main processor 1 would begin processing the data while the shadow processor 2 stores the context of the interrupted task.

The Register Bridge unit 19 allows multiple access to a set of registers by both host and shadow processor. It allows physical registers to appear in both processor systems while resolving any conflict in

their access and mapping of those registers within the physical resource space of the processors.

5 This unit contains multiplexers to allow dual access to either processor buses, arbitration logic to prevent access conflict, and logic to allow access addresses to be altered to allow re-mapping of the location of the registers in the address map of either processor.

10 For example registers mapped to positions 4-7 in the host may appear also in positions 4-7 in the shadow or be re-mapped to 8-11 of the shadow. Or in the case of register swapping, registers x-y of the host may be exchanged for equivalent registers in the shadow and vice-versa. This allows registers x-y of the shadow to
15 be loaded with a new context then swapped in to the host in a context change. The registers replaced in the shadow would contain the old host context and can be stored or re-stored by the shadow while the host is processing the new context.

20 While the host processor 1 is processing a task or is in an unactive ("sleep") mode, the shadow processor 2 will accept interrupts to determine the requirement and decide on the action required. If the action can be handled by the shadow processor alone then it is
25 serviced without reference to the host, but if it does require some intervention by the host, the shadow processor 2 will activate the host processor by way of the host interrupt controller 18.

30 In the example shown, the shadow processor 2 can service routine requests from the peripherals without the need for host intervention. Data to be processed is shared between the host processor and the shadow processor by way of the register bridge unit 19, in order that the same data can be operated on by both
35 processors.

It will be readily appreciated that, the shadow processor 2 is able to use a subset of the instruction set of the host processor. The main advantage of such a shadow processor is that instruction code can be readily shared between the host and the shadow, without the need for processor emulation or complex code conversion. The other significant advantage is that any work needed to develop the shadow processor can be based on the host processor development work. In addition, the shadow processor design can be optimised, based specifically on the processing of a limited range of instructions of the host processor. Code written for such an application can be analysed to identify the most frequently used instructions, and shadow processors can be provided for those most frequently used instructions. The shadow processor can then be based on the common instruction set but minimum register and addressing range requirements. The shadow processor has access to all the relevant register and memory areas used by the host processor and so the host and shadow processor can work in tandem, the shadow processor performing tasks for which it is designed independently of any reference to the host processor. It will be appreciated that a plurality of shadow processors can be used with a single host processor to provide efficient data processing without the need to refer directly to the host processor itself.

One particular advantage of such system is that the shadow processor can service interrupt requests and other routine tasks without the need to move the host processor into an active state. This can reduce the power consumption of the processing system in total.

It will be appreciated that it is possible to provide all of the functionality of a single host processor by a plurality of shadow processors each

dedicated to a single part of that functionality of the host processor. In this way it is possible to produce a processing architecture which does not need to use a host processor as such, but can use a group of shadow processors each of which is optimised for a particular function. Such architectures are illustrated in Figures 2 and 3, which show that shadow processors can be arranged to share data and registers so that processing of program steps can have continuity.

Figure 2 is an application of a shadow processor concept without the use of a host processor.

A number of shadow processors are arranged in sequence; each processor performs a particular process on data derived from previous shadow processors and passes the processed data on to the next in the sequence. The sequence has input/output ports on the end shadow processors for connection to other system components. Processing occurs in both directions from shadow processor (i.e. 1 to 5 and 5 to 1). In addition sections 3 and 4 contain two shadow processors (A&B) with additional input/output to be combined with the main sequence. Shadow processor 6 performs the task of memory control and ensures that appropriate code is loaded into the shadow processors from main memory as required. It also performs the main co-ordination task for the system.

An application is of such a configuration could be a telecommunications terminal. The I/O of shadow processor 1 would be attached to the RF subsystem, I/O of processor 5 to the Audio sub-system. The secondary I/O of shadow processors 3b/4b to the data processing, and user interfaces e.g. LCD and keyboard. Each of the shadow processors 1-5 perform specific tasks required such as audio codec, interleaving/de-interleaving, etc.

Figure 3 is an example of a virtual processor

concept.

5 The main processor is provided as a virtual
processor, which may only exist in concept and as a
simulation. From this virtual processor various
10 applications are analysed and specific implementations
derived. Three such implementations 1-3 are drawn
below the Host. Each of the implementations contains
specific components of the host required by the
applications. For example, Shadow processor A. (1)
10 could be characteristic of a RISC CPU, Shadow processor
B (2) could be an example of a logic processor, and
Shadow processor C (3) could be an example of a memory
management processor.

15 The important distinction of figure 3 is that the
host is a virtual processor it may not physically
exist.

 The shadow processors are optimised fragments of
the virtual processor synthesised to a physical
implementation on a chip.

CLAIMS

1. A processing arrangement for a computer comprising:

5 first processor means for processing a first set of instructions; and

second processor means for processing a second set of instructions, the second set of instructions being a subset of the first set of instructions, wherein the second processor means is arranged to receive control signals and to process instructions in dependence upon those control signals without reference to the first processor means.

2. An arrangement as claimed in claim 1, wherein the first processor means includes a plurality of registers, and the second processor means has access to a predetermined selection of the said registers.

3. An arrangement as claimed in claim 1 or 2, wherein the first processor means has active and inactive states of operation, and wherein the second processor means is operable to process instructions when the first processor means is in the inactive state.

4. An arrangement as claimed in claim 3, wherein the second processor means is operable to cause the first processor means to change to the active state from the inactive state, when received control signals are indicative of instructions which cannot be processed by the second processor means.

5. A method of operating a computer including first processor means for processing a first set of instructions, and second processor means for processing a second set of instructions, the second set of instructions being a subset of the first set of instructions, the method comprising:

35 using the second processor means to receive

control signals; and

processing instructions in dependence upon the received control signals using the second processor means without reference to the first processor means when the received control signals are part of said second set of instructions.

6. A method as claimed in claim 5, wherein the first processor means has active and inactive states of operation, and instructions are processed using the second processor means when the first processor means is in the inactive state if they are part of said second set.

7. A processing arrangement for a computer, comprising first and second processors, the second processor being code compatible with the first processor, such that instruction code can be shared between the first and second processors and can be operated on by the first or second processor without the need for conversion or alteration.

8. A processing arrangement for a computer comprising a plurality of processing elements, each element being assigned a predetermined function, wherein the processing elements are able to share instruction code without conversion or alteration, and the plurality of elements provides functionality equivalent to a predetermined virtual processor.

ABSTRACT

PROCESSING ARRANGEMENTS

5

A processing arrangement for a computer
comprising:


first processor means (1) for processing a first
set of instructions; and

10 second processor means (2) for processing a second
set of instructions, the second set of instructions
being a subset of the first set of instructions,
wherein the second processor means (2) is arranged to
receive control signals and to process instructions in
15 dependence upon those control signals without reference
to the first processor means.

[FIG. 1]

THIS PAGE BLANK (USPTO)

Fig 1

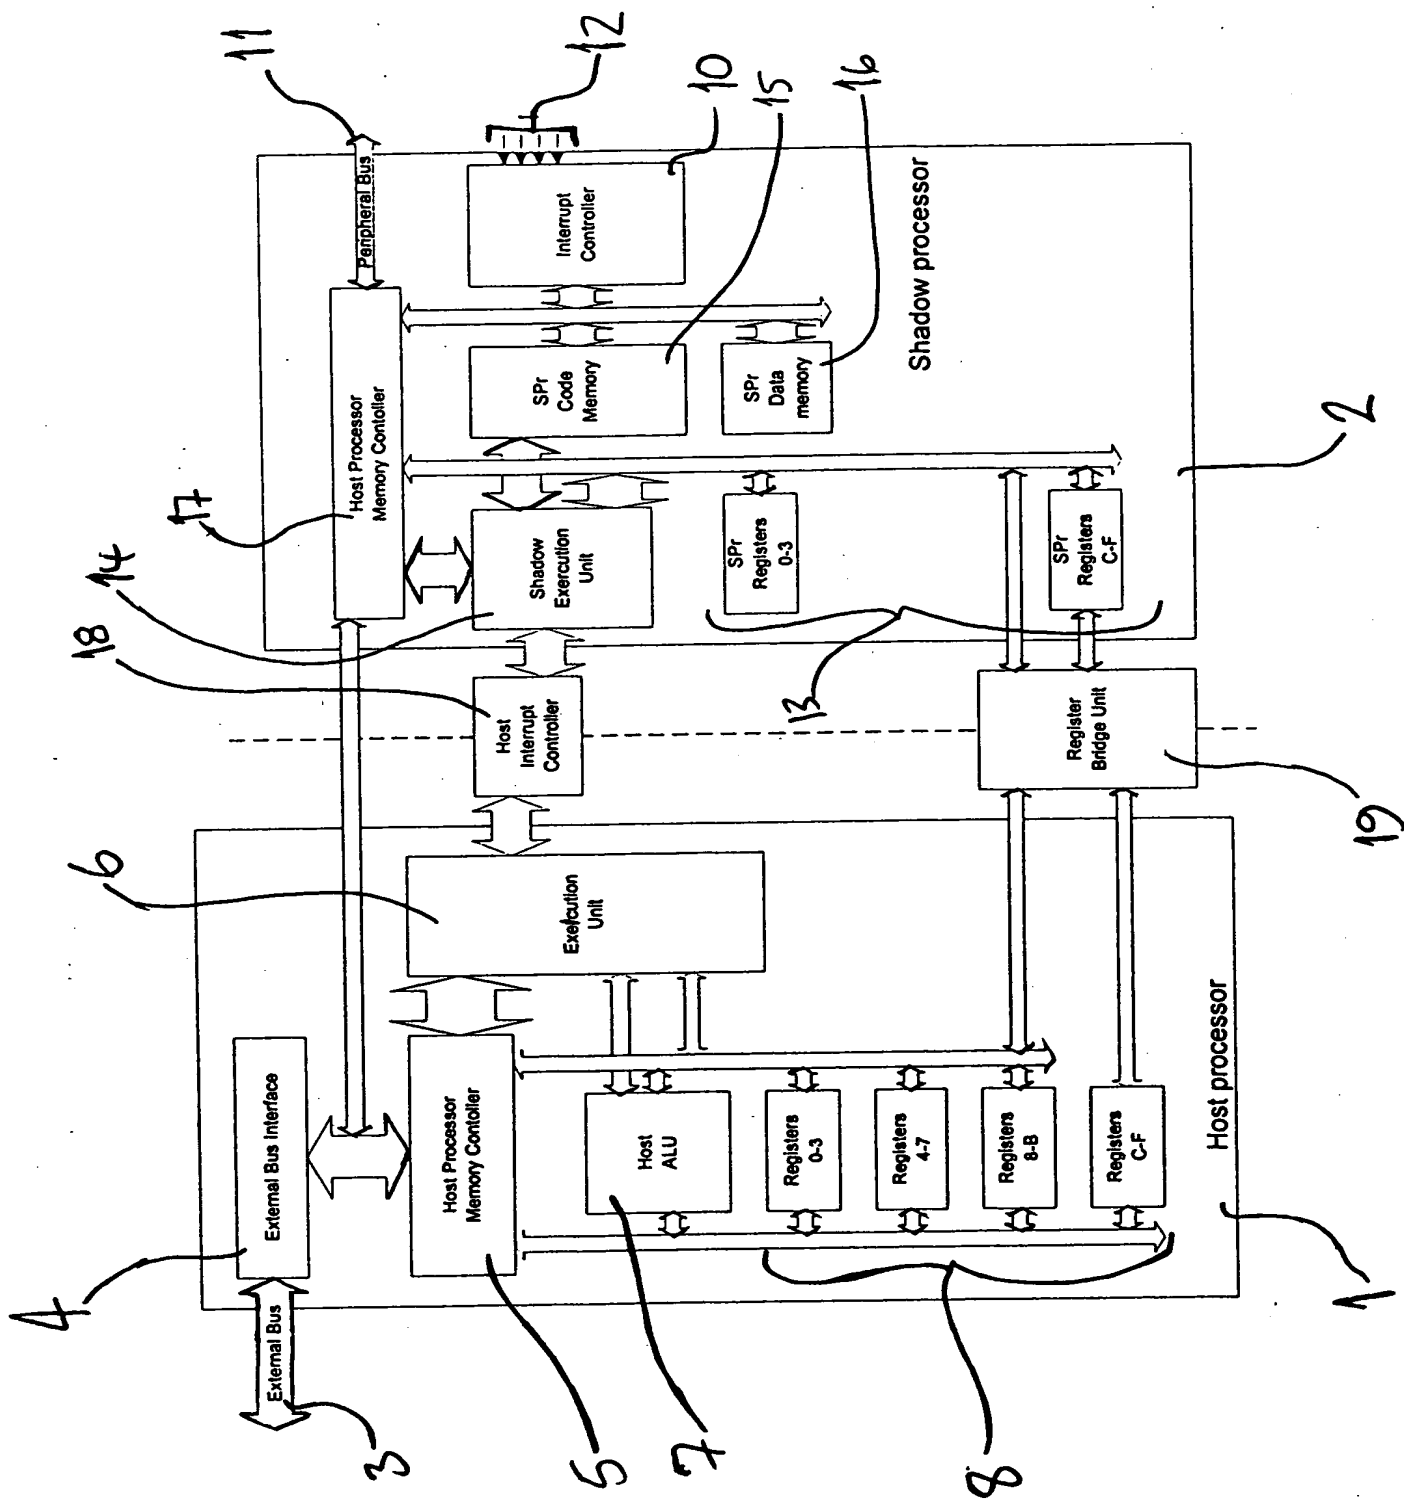

THIS PAGE BLANK (USPTO)

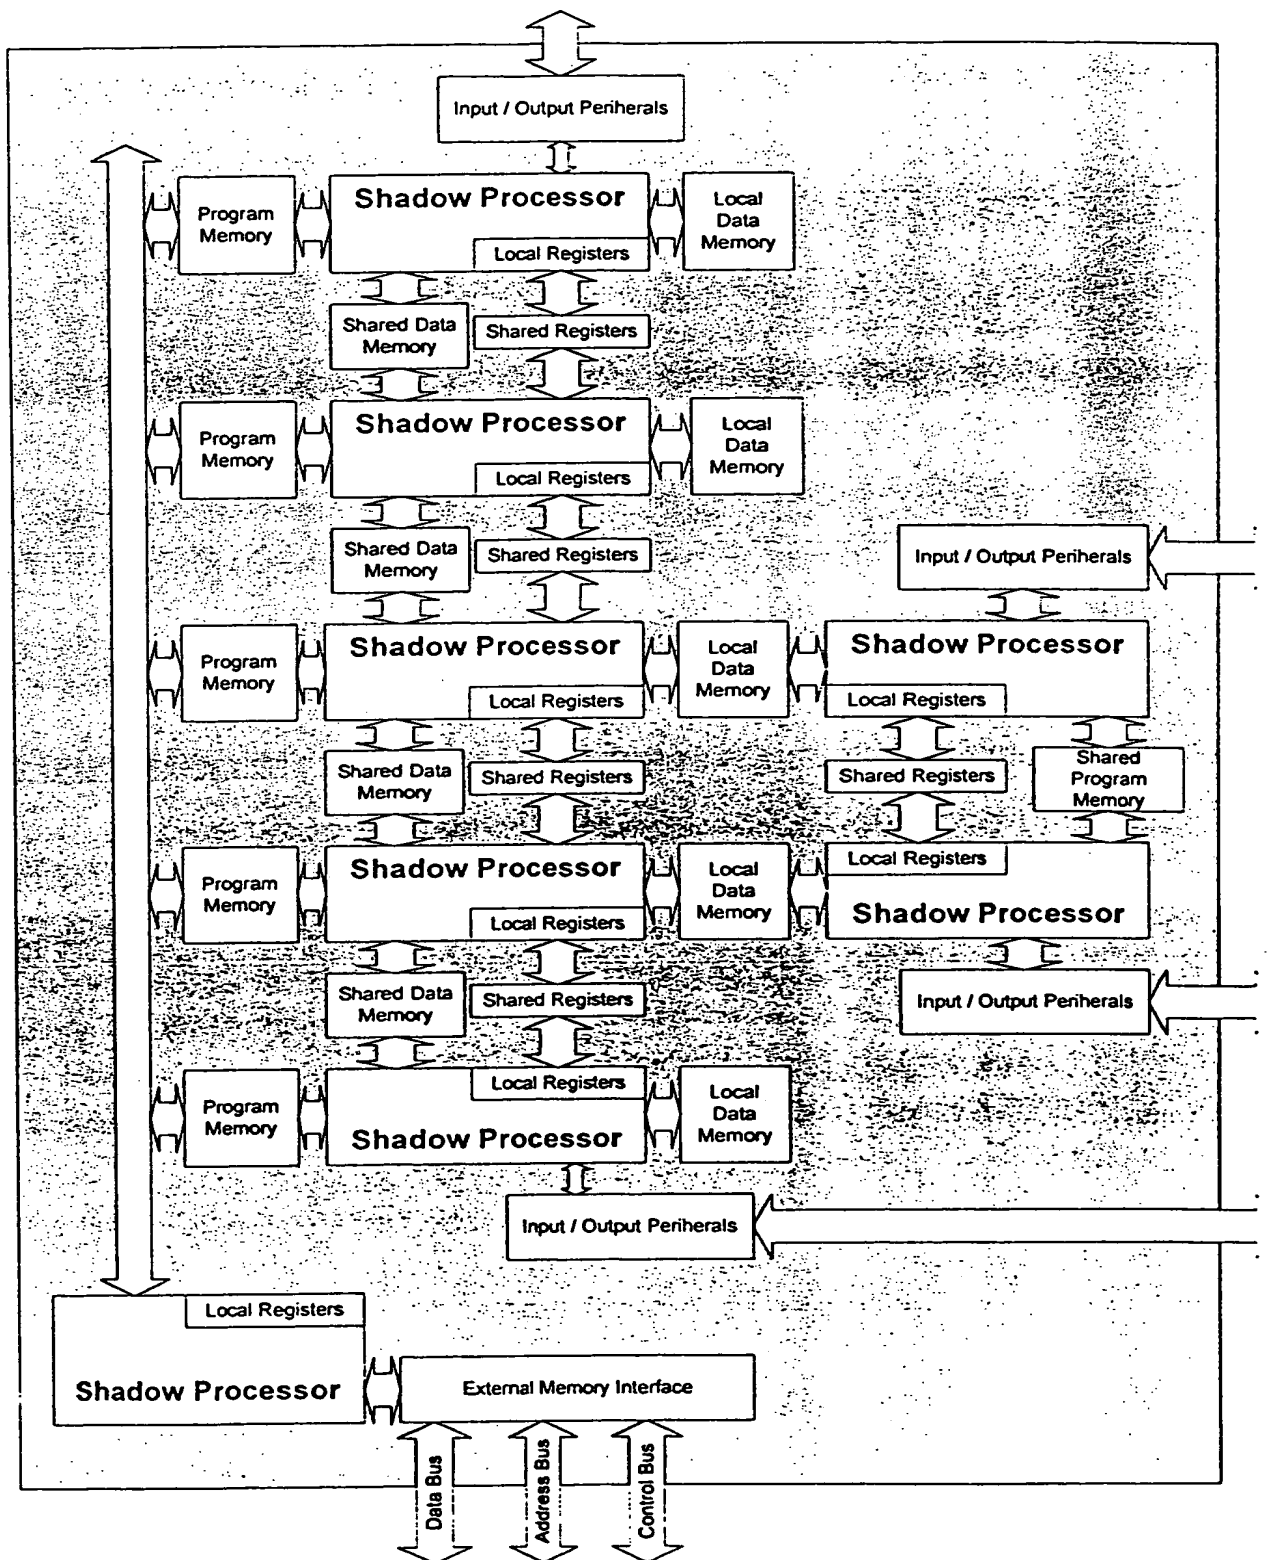


Fig. 2

THIS PAGE BLANK (USPTO)

**Figure 3. - Example Virtual Processor to
Shadow Processor Synthesis**

- R.Naylor

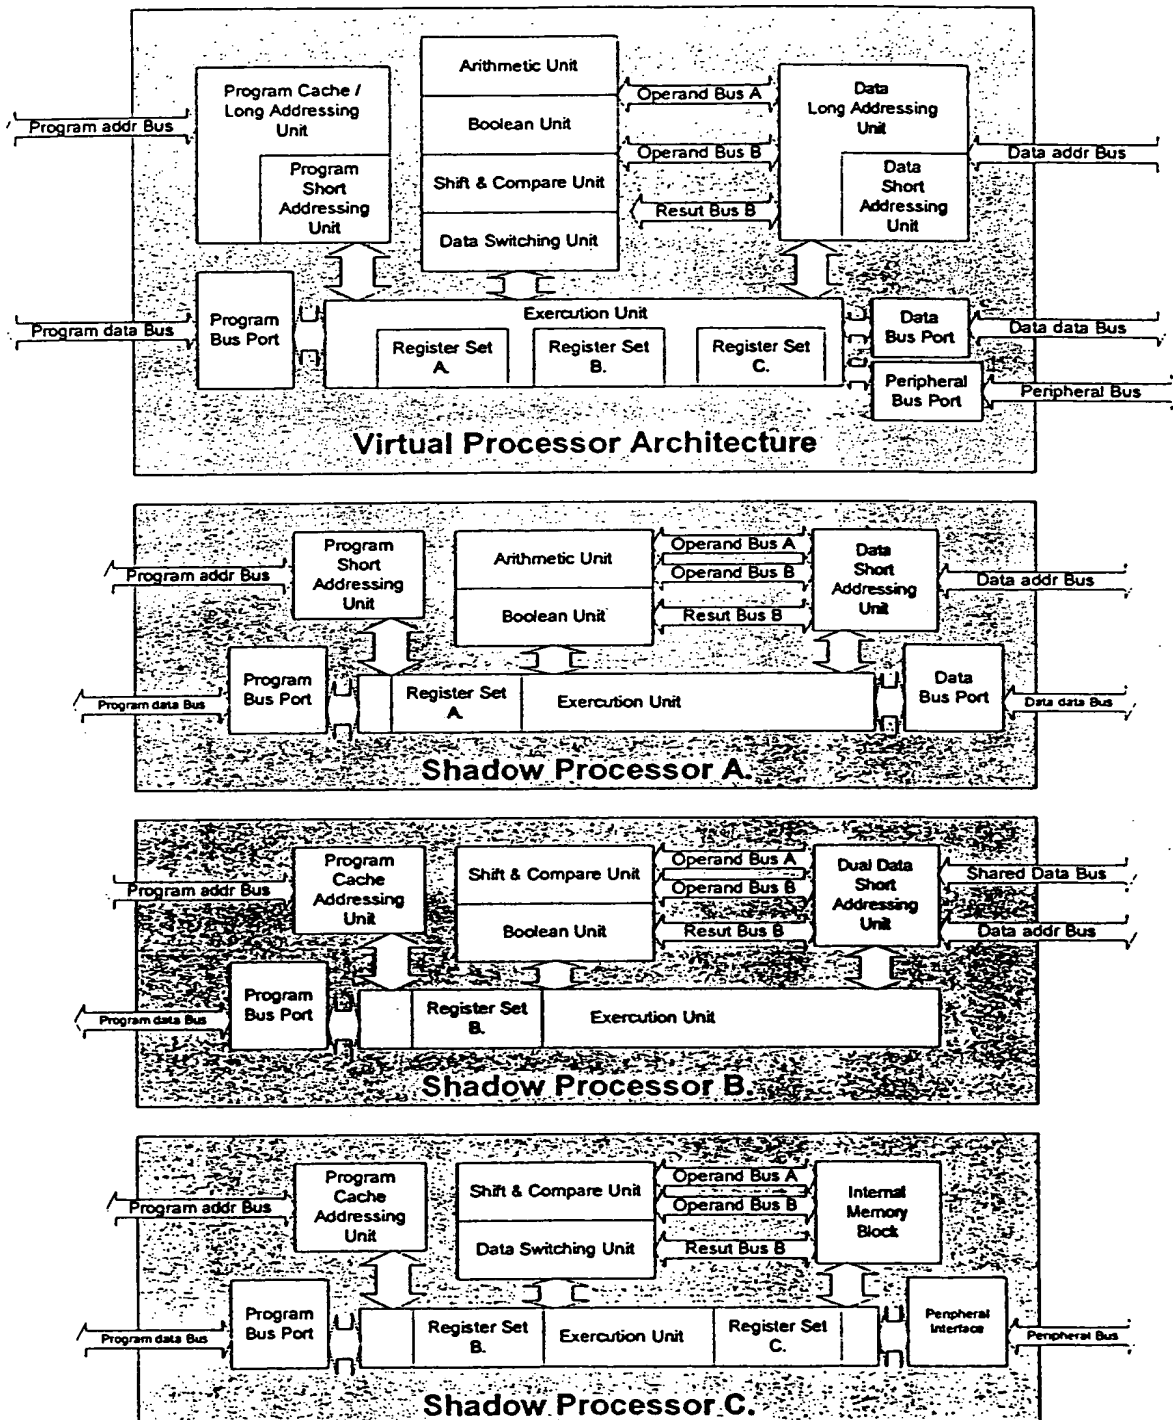


FIG. 3

THIS PAGE BLANK (USPTO)